

SOLID BUSINESS MACHINES CENTER, INC.

SUITE 303, SINGSON BUILDING, PLAZA MORAGA, BINONDO, MANILA, PHILIPPINES 1006
Trunkline: (632) 242-1111 Connecting all Departments Fax No.: (632) 242-1345, 242-1348
e-mail: sales@solidmac.com.ph

www.solidmac.com.ph






Fireproof

DataCast endothermic fire insulation technology protects your data from extreme heat. The DataCast formulation forms a chemical bond with water molecules that, at temperatures above 160°F, releases water vapor to limit the internal temperature of the unit during a fire.

* Per ASTM E119

Waterproof

HydroSafe water barrier technology is designed to protect data loss from fresh or salt water damage, including full immersion. While keeping your data dry, the HydroSafe technology still allows heat to dissipate during normal operation.

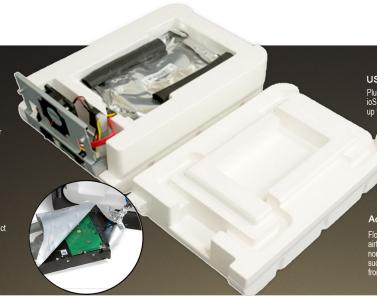

COMPARE MODELS

USB 2.0

Plug and play USB 2.0/3.0 connectivity allows you to use your ioSafe with virtually any Mac or PC and provides data transfer up to 5Gb/s.

Active Airflow Cooling

Solo

FloSafe active airflow cooling technology provides cooling airflow through the enclosure and across the disk drives during normal operating conditions. If destructive heat levels are sensed, such as in a fire, the FloSafe vents limit and protect your data from the extreme heat.

Rugged

TECHNICAL SPECIFICATION

Operational Details

- ▶ Single disk, up to 2TB storage capacity available
- Quiet forced air cooling
- Multi-platform compatibility: Windows, Mac and Linux
- ▶ USB 2.0, up to 480Mb/s, 7200 RPM

Disaster & Security Specifications

- ▶ Fire protection: 1550F, ½ hr per ASTM E119
- ▶ Flood / submersion protection: to 10 feet water depth, 3 days.
- ▶ Tested per UL, FCC and CE Standards
- Proven data protection and recovery. Tested to ASTM E119 standards for fire exposure.
- Physical theft protection: Cable lock or floor Mount capable

Support

- ▶ 1 Year Data Recovery Service Standard (3 and 5 year plans available)
- 3 Year manufacturer's warranty for defects Standard (5 year available with purchase of 5 year DRS upgrade)

Inside The Box

- ▶ ioSafe Solo USB External Hard Drive
- ▶ USB 2.0 Cable
- Power Supply
- Owners Manual and Warranty

Electrical

- ▶ Electrical AC input
- Voltage: 80 ~ 264 VAC at 50/60 HZ
- ▶ Typical Power Consumption: < 25W

System Requirements

- ▶ Intel Pentium II 350 MHz-compatible or Mac G3 processor & greater
- Microsoft Windows XP/Vista/7 or Mac OS 8.6 & greater
- ▶ USB 2.0 equipped system
- ▶ For USB 2.0 speeds, the system must support USB 2.0 specifications

Operating Environment

- ▶ Operating: 0-35° C (95°F)
- Non-operating: 0-1550°F, ½ hr per ASTM E119
- ▶ Operating Humidity: 20% 80% (non-condensing)
- Non-operating Humidity: 100%, Full water immersion, 10 feet, 3 days.

Physical

- ▶ Size: 5.0"W x 7.1"H x 11.0"L
- ▶ Weight: 15 lbs

		USB 2.0	Portable
Operating System	Windows (XP, Vista, 7)	•	•
	Mac OS X (8.6 and Greater)	•	•
	Linux (Debian,Suse, Fedora Core, Redhat)		•
DATA	Data Recovery Service	1 time for 1 year	1 time for 1 year
PROTECTION	Forensic Data Recovery Coverage	✓	✓
Physical Protection	Fireproof	•	
	Waterproof	•	•
	Crushproof & Shockproof		•
	Anti-Theft Floor Mount	•	
	Kensington Lock Slot		•
	No-Hassle Warranty	•	•
Connectivity	USB 2.0	•	•
	USB 3.0		•
Performance	Max Interface Speed	480 Mbit/s	5 Gbit/s
	Rotational Speed	7200 RPM	5400 & 7200 RPM
Storage	Max Storage	2 TB	1 TB
Warranty	Complimentary coverage	2 Years	2 Years

WARRANTY + DATA RECOVERY SERVICE



Extended Warranty

3	Three(3) Year				
	Year 1	Year 2	Year 3		
DRS					
Warranty					

Complimentary Support

Every ioSafe Solo comes with a two-year limited warranty and one-year of complimentary one time use data and hardware recovery support.

Extended Warranty

Extend your coverage to three years of service and expert data and hardware recovery support



	Year 1	Year 2	Year 3	Year 4	Year 5
DRS					
Warranty					

^{*}Specification may change without prior notice